


Flexotherm™ specializes in providing products to our customers involved in emissions testing that help to ensure accurate and consistent performance. Dual rinse cleaning carts from **Flexotherm™** are the fastest and most efficient method available for flushing contaminants from emissions testing components.

Applications:

- ◆ Circulates heated Alconox (liquid or powder) throughout sample train.
- ◆ Purge contaminants for more accurate results.
- ◆ Saves man-hours over manual methods - Improving productivity.

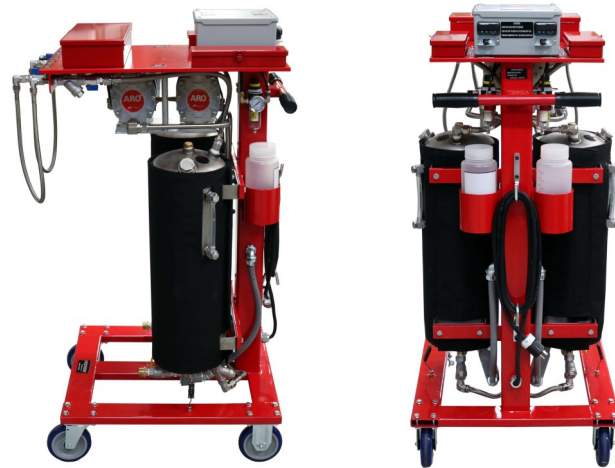

Key Features:

- ◆ Versa Mount Dual Head 4.6 GPM Air Driven Pump.
- ◆ 1250 Watt Immersion Fire Rod Heaters
- ◆ Dual Display Digital Temperature Controller.
- ◆ 15 amp Circuit Breakers
- ◆ 316 SS NPTF Drain Ball Valves with Locking Handles
- ◆ 1/2" (0.0127 m) ID Stainless Steel Braided Teflon hoses.
- ◆ Developed and tested by leading OEM at world-class test facilities

Specifications:

- ◆ Power: 120 VAC
- ◆ Compressed Air
- ◆ Compact Footprint
- ◆ 5-Gallon (18.927 liters) Stainless Steel Tanks.
- ◆ Frame constructed of Heavy Duty Steel.
- ◆ Liquid Level Indicators
- ◆ Bronze Y-strainers with #60 mesh.
- ◆ 5" (0.127 m) casters
- ◆ Heavy Duty Power Cord with strain relief